

¡NUEVAS!

TRANSFERENCIAS.

Con la integración de lógica de accionamiento electrónico y los nuevos SECCIONADORES CONMUTADORES MOTORIZADOS DE ABB®.

Estos seccionadores actúan como interruptores de doble tiro.

Su accionamiento se limita al momento de hacer el switcheo, evitando daños en bobinas causados por sobretensiones. Incluye manija para accionamiento manual.

Reduce los costos en comparación con las transferencias de contactores.



Motorized change-over switches, I-0-II -operation, open transition

Including a handle for manual operation, bolt kit with nut and washers for all terminals and male connectors for control circuits. Types OTM160-250E_W are equipped with extended phase distance.

Rated current AC-21A...AC-22A Up to 415 V I [A]	Rated power AC-21A 400 V S [kVA]	AC-23A 400...415 V I [A] / P [kW]	Type	Order number	Weight [kg]
3-pole Motor operation, operational voltage $U_n = 220-240$ V AC ¹⁾					
160	110	160 / 90	OTM160E3CM230C	1SCA022845R8610	6.6
160	110	160 / 90	OTM160E3WCM230C	1SCA022846R4000	6.9
200	135	200 / 110	OTM200E3CM230C	1SCA022845R8960	6.6
200	135	200 / 110	OTM200E3WCM230C	1SCA022846R3960	6.9
250	170	250 / 140	OTM250E3CM230C	1SCA022845R9260	6.6
250	170	250 / 140	OTM250E3WCM230C	1SCA022846R4770	6.9
315	215	315 / 160	OTM315E3CM230C	1SCA022847R1210	11.1
400	275	400 / 220	OTM400E3CM230C	1SCA022847R1630	11.1
630	435	630 / 355	OTM630E3CM230C	1SCA103567R1001	22
800	550	800 / 450	OTM800E3CM230C	1SCA103570R1001	22
4-pole Motor operation, operational voltage $U_n = 220-240$ V AC ¹⁾					
160	110	160 / 90	OTM160E4CM230C	1SCA022848R1510	7.5
160	110	160 / 90	OTM160E4WCM230C	1SCA022846R7440	7.9
200	135	200 / 110	OTM200E4CM230C	1SCA022846R1590	7.5
200	135	200 / 110	OTM200E4WCM230C	1SCA022846R7870	7.9
250	170	250 / 140	OTM250E4CM230C	1SCA022846R1910	7.5
250	170	250 / 140	OTM250E4WCM230C	1SCA022846R250	7.9
315	215	315 / 160	OTM315E4CM230C	1SCA022847R2870	12.5
400	275	400 / 220	OTM400E4CM230C	1SCA022847R3250	12.5
630	435	630 / 355	OTM630E4CM230C	1SCA022873R1990	25
800	550	800 / 450	OTM800E4CM230C	1SCA022872R8340	25


1) Other voltages on request

General technical data of motor operators

	Value
Rated operational voltage U_n	220-240 V AC, 110 V AC/DC, 48 V DC, 24 V DC
Operating voltage range	0.85...1.1 x U_n
Operating angle	90°: 0-I, 0-II; 180°: I-0-II
Protection degree	IP20
Operating temperature	-25...+40 °C

Control circuit connections

- Terminal for voltage supply of motor operator
- Terminal for remote control
- Terminal for handle and locking status

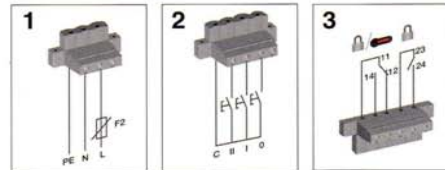

MÁS ECONÓMICAS . FABRICADAS CON TECNOLOGÍA EUROPEA ABB